
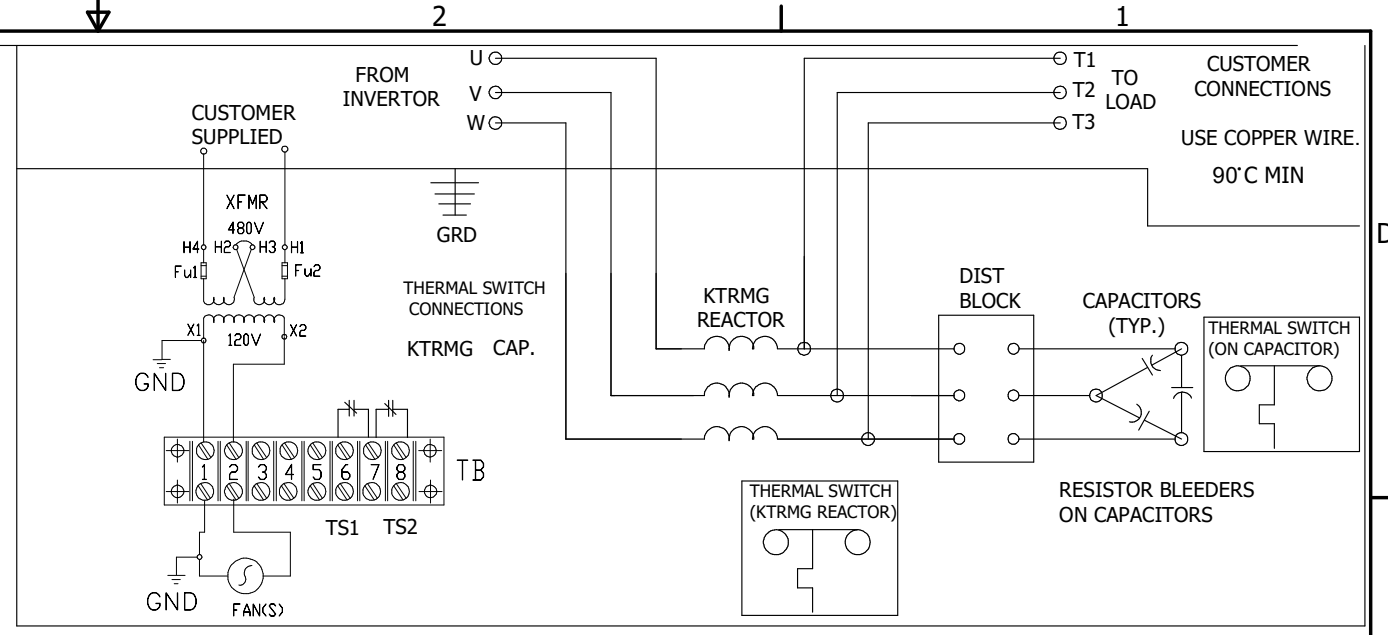
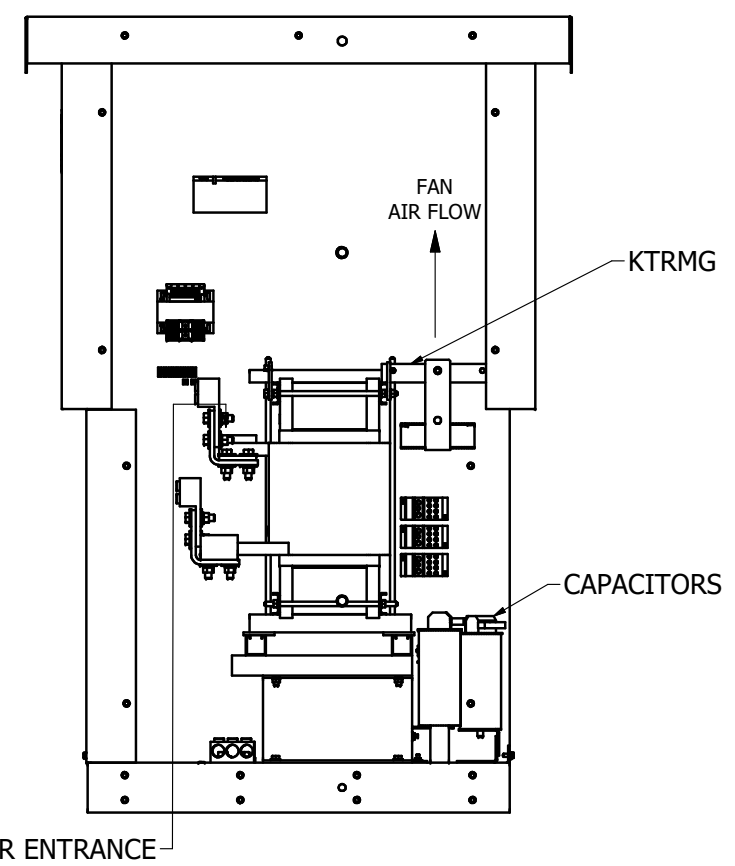
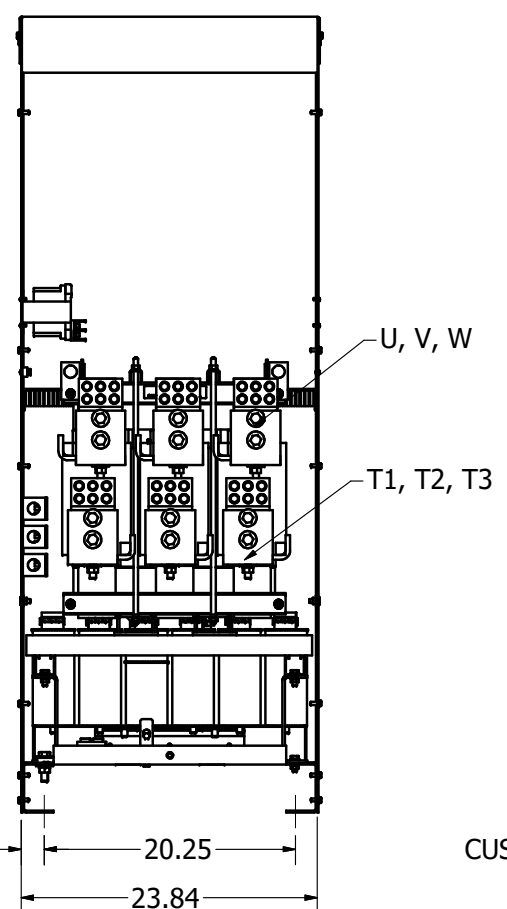


THERMAL SWITCH AND FAN PWR TB LOCATED ON SIDE OF ENCLOSURE.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.



MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	PRESSURE TERMINAL RANGE
MSN0960A300	800	480V	960 AMPS	875LBS	(3)(600MCM-2AWG)

NOTE: FOR TERMINAL TORQUE SEE IOM MANUAL.

TOLERANCES (EXCEPT AS NOTED)		TCL	W132 N10611 Grant Drive Germantown, WI 53022
DECIMAL	XX +/- .25		
	XXX +/- .125	MSN0960A300 MotorShield Sinewave Filter 480/3/60, Type 1/3R.	
FRACTIONAL	+/- 1/16		
ANGULAR	7/22/15 DSW	DRN. BY	DATE
		SCALE	APRVD.
NO	REVISION	DATE	BY
		SCALE	APRVD.
		1/10	
			DWS. No. 106087DG
			SHEET 1 OF 1