

480 VOLTS
60Hz

FROM
DRIVE

U
V
W

CUSTOMER CONNECTIONS
INTO SINEWAVE FILTER


CUSTOMER
CONNECTIONS

USE COPPER WIRE
60°C MIN <100 A.
75°C MIN ≥100 A.

T1
T2
T3 TO
LOAD


GRD

POWER SCHEMATIC

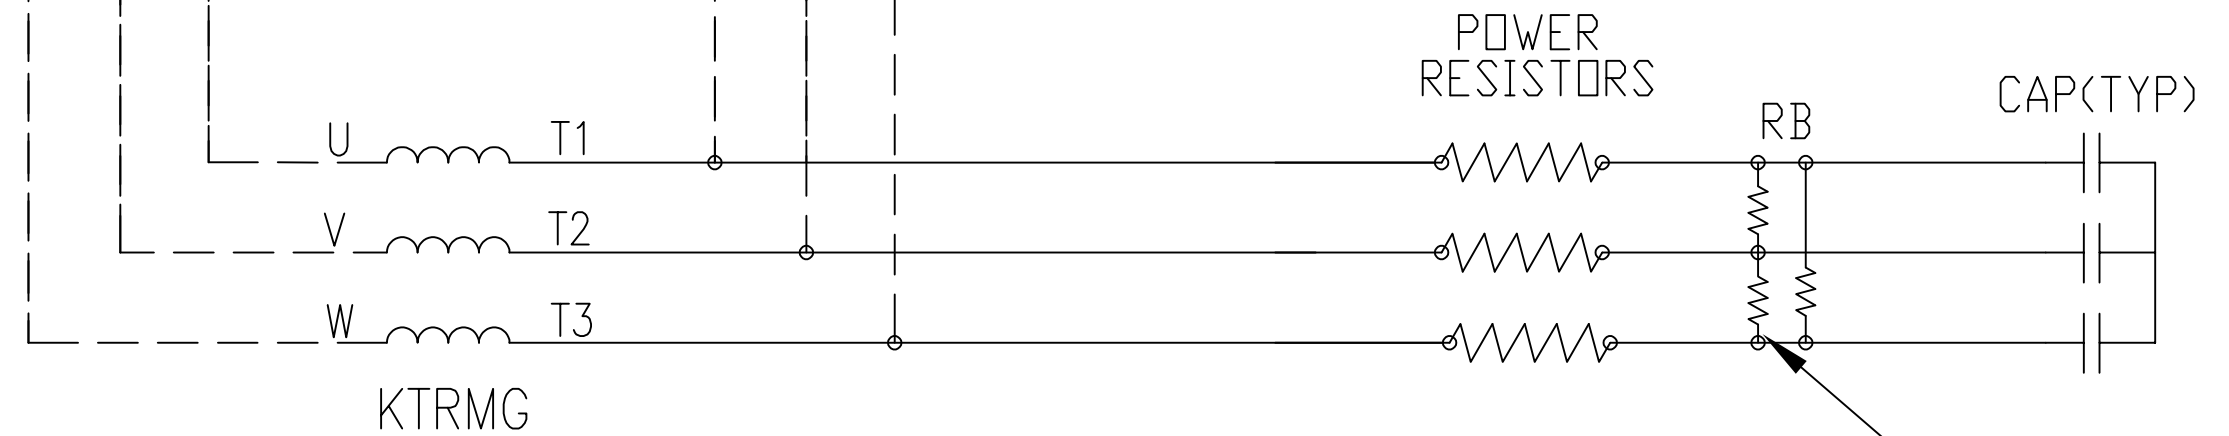

BLEEDER RESISTORS
ON CAPACITORS

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				,XX ± NA ,XXX ± NA	
				FRACTIONAL ± NA	
				ANGULAR ± NA	DRN. BY DSW
NO	REVISION	DATE	BY		DATE 11/25/08
					DWG. NO. B 26886
					SCALE 1/8"=1"
					APRVD.
					SHT.1 OF 1