


Parts List			
TCI Part #	Description	Quantity	Item #
11236	Lug Two 600 kcmil	6	1LK
10251	Hex Hd Bolt 1/2-13 X 2 In	6	2LK
1610	Nut 1/2-13	6	3LK
1512	Flat Washer 1/2"	12	4LK
1511	Split Lock Washer	6	5LK

Table 2S600		IHI Connectors		
Wire Size Copper (solid to semi-rigid stranded and metric mm, ##)	Rating C	Wire Size FLEX Copper (#)	Wire Size Aluminum	Torque (all drive means)
600kcmil-4	90	444-2	600-4	500 in-lb (56.5 N-m)

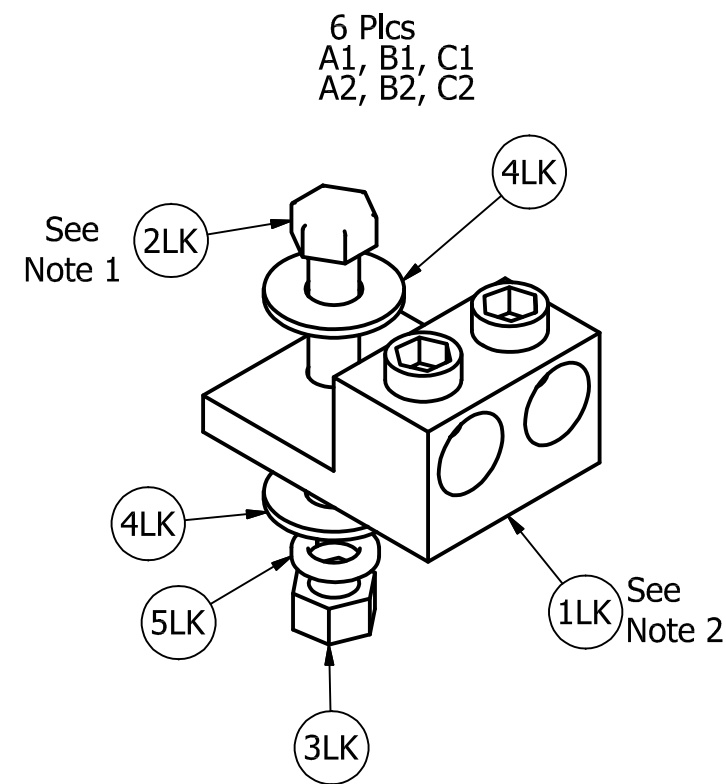


**IHI Connectors**  
International Hydraulics Inc.  
ihiconnectors.com™

SA 200116      UL Listed 84JM ZMVF E129884

Pressure Terminal Connectors  
NRTL Cat. No.  
**2S600**

600kcmil-4 AL9CU

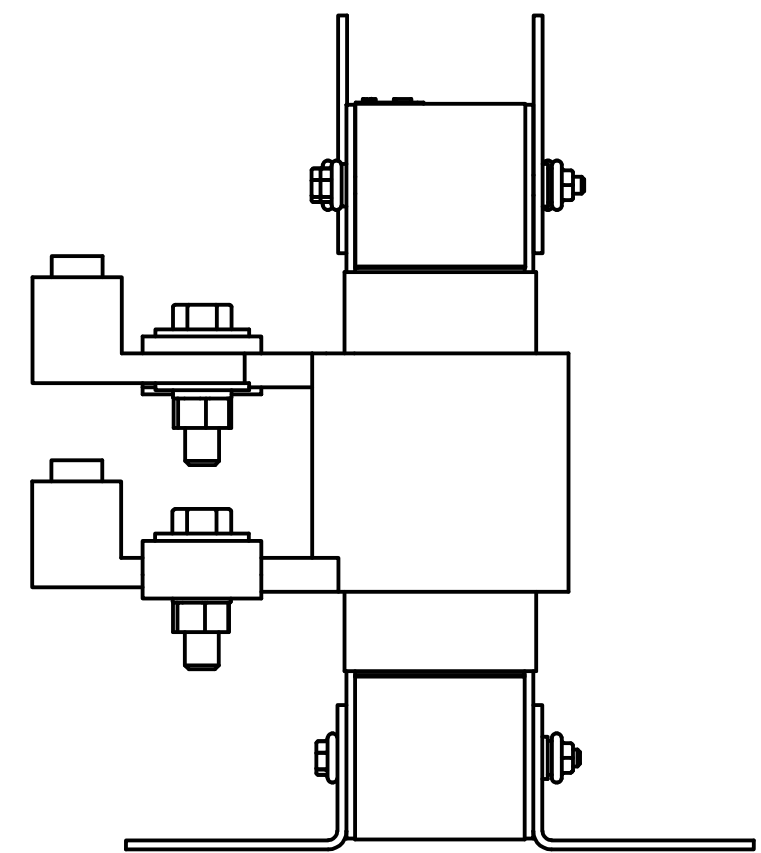

Notes:  
 1.) Torque bolt (Item #2LK) to 450 in-lb (50.8 N-m).  
 2.) To prevent lug from rotating place lug on underside of tab as shown.

Follow NEC guidelines to determine acceptable wire ampacity requirements.

				TOLERANCES (EXCEPT AS NOTED)	<b>TCI</b> W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				.XX ± .25	Lug Kit, 2-600MCM-4
				.XXX ± .10	
				FRACTIONAL	DRN. BY: JRN
				± 1/16	DATE: 8/31/17
				ANGULAR	APRVD:
				± 1°	SCALE: B
NO	REVISION	DATE	BY		LK14-Dwg
					SIZE B
					SHT.1 OF 1